

BAYLAN

WATER METERS

TK-26 RF

Multi jet Dry type


Water Meter



GENERAL


LoRa & wM-Bus Smart Water Meter

- Compact design; meter and communication module in the same housing
- Integrated Lora module-chipset allows both LORA and FSK modulation
- Supports LoRaWAN™ - Class A Protocol
- Supports Wireless MBUS Protocol
- Supports LoRaWAN™ and Wireless MBUS Protocols simultaneously (Optional)
- Selectable Frequency Band EU 863-870 Mhz
- Power Supply 3.6V Lithium Battery • MID Certified
- Vacuumed/air-free mechanism suitable for tropical installation conditions
- Electrostatic epoxy painted body made of corrosion-resistant brass alloy
- Multi jet working principle assures a long service time
- Suitable for potable water and cold water up to 50°C
- Low pressure loss, high sensitivity at initial flow
- Special glass with high resistance to pressure and impact
- Star wheels indicator ready for optical pulse read-out
- 3 years of warranty • Integrated strainer and non-return valve
- Almost no maintenance
- Service and spare parts available for 10 years

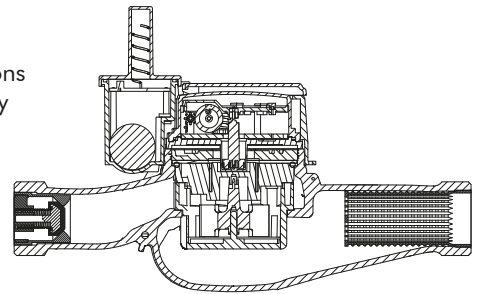

PERFORMANCE DATA

Overload Flowrate	Q4	m ³ /h	12,5
Permanent Flowrate	Q3	m ³ /h	10
Transitional Flowrate	Q2	m ³ /h	0,064
Minimum Flowrate	Q1	m ³ /h	0,04
Q3/Q1 (MI-001 OIML R49)			≤250
Mounting on the network			H
Maximum Registration Capacity			99999 / 99999,99 / 99999,999
Initial Flowrate	Qi	l/h	9
Maximum Working Pressure		bar	16
Maximum Working Temperature		°C	50
Pressure Loss		bar	0,63
Smallest Reading Resolution		m ³	0,00005
Class			Class 1 / Class 2

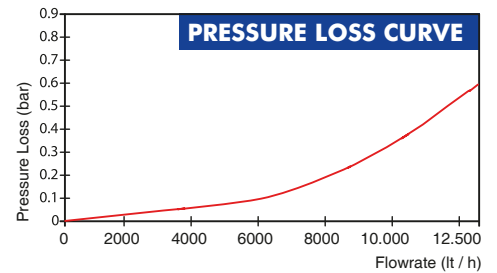

DIMENSIONS

Nominal diameter	DN	25	32	mm
Connecting diameter	D	G1 1/4	G1 1/2	B
Total overall meter height	H	162,1	162,1	mm
Axis height	h	41,5	41,5	mm
Width	B	92	100	mm
Length	L	260	260	mm
Length with connections	LB	380	380	mm
Unit weight		2,21	2,24	kg
Package Weight (without connect)		11,67	11,70	kg
Package Weight (with connect)		13,90	15,10	kg
Quantity per package		5	5	pcs
Package dimensions		29x60x20	29x60x20	cm

