



BAYLAN


WATER METERS

TY-9

Multi jet Wet type Water Meter



GENERAL

- MID Certified
- Multi jet working principle assures a long service time
- Available for optical reading
- Electrostatic painted body made of corrosion resistant brass
- Pulse output optional
- Suitable for potable water
- Non return valve
- Low pressure loss, high sensitivity at initial flow
- Special glass with high resistance to pressure and impact
- 360° rotating lid
- Suitable for cold water up to 50°C
- Almost no maintenance • 3 years of warranty
- Service and spare parts available for 10 years

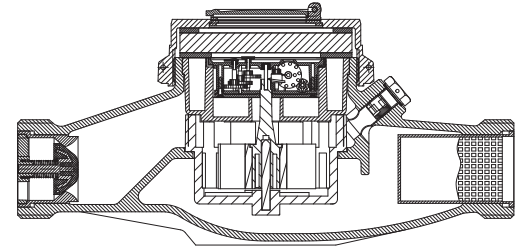


PERFORMANCE DATA

Overload Flowrate	Q4	m ³ /h	20		
Permanent Flowrate	Q3	m ³ /h	16		
Transitional Flowrate	Q2	m ³ /h	0,16	0,128	0,1024
Minimum Flowrate	Q1	m ³ /h	0,10	0,08	0,064
Q3/Q1 (MI-001 OIML R49)	-		160	200	250
Mounting on the network	-		H		
Maximum Registration Capacity	m ³		9999 / 99999 / 99999,99 / 99999,999		
Maximum Working Pressure	bar		16		
Maximum Working Temperature	°C		50		
Pressure Loss	bar		0,6		
Initial Flow	Qi	l/h	30		
Smallest Reading Resolution	m ³		0,00005		
Class	-		Class 1/Class 2		
Unit weight	kg		4,17		
Package Weight (without connect)	kg		18,32		
Package Weight (with connect)	kg		22,28		
Quantity per package	-		4		
Package dimensions	cm		34x37x36,5		

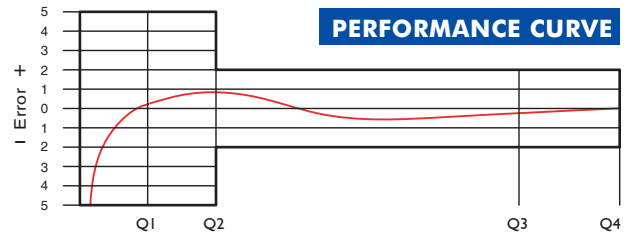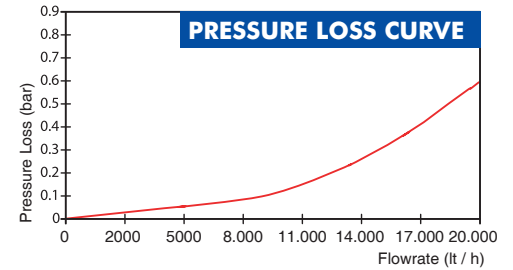

DIMENSIONS

Nominal diameter	DN	40	mm
Connecting diameter	D	G2	B
Total overall meter height	H	139	mm
Axis height	h	44	mm
Width	B	128,5	mm
Length	L	300	mm
Length with connections	LB	430	mm

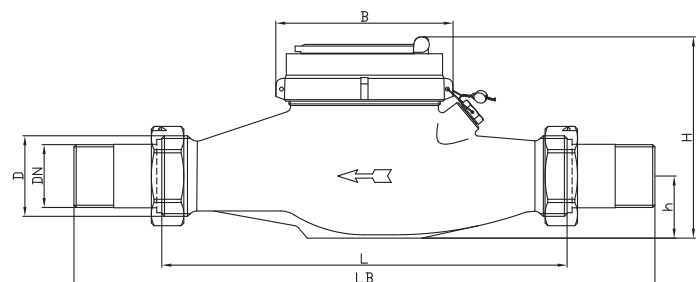

"Due to continuous development of our products, we reserve the right to modify our product design or construction without prior notice."