

BAYLAN

WATER METERS


VK-12P

Volumetric Water Meter





GENERAL

- MID Certified
- Volumetric principle assures very high sensitivity even at low flow
- Suitable for potable water
- Very good sensitivity in initial starting
- Special glass with high resistance to pressure and impact
- Composite body with high resistance to pressure and impacts
- Protection against external magnetic fields
- Available for optical reading
- AMR reading features are optional
- 3 years of warranty • Non return valve
- Suitable for cold water up to 50°C
- Almost no maintenance • 359° rotating dial
- Service and spare parts available for 10 years
- Brass or composite end connection options

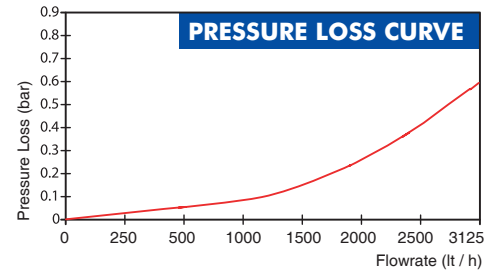

PERFORMANCE DATA

Overload Flowrate	Q4	m ³ /h	3,125
Permanent Flowrate	Q3	m ³ /h	2,500
Transitional Flowrate	Q2	m ³ /h	0,008
Minimum Flowrate	Q1	m ³ /h	0,005
Q3/Q1 (MI-001 OIML R49)	-		≤500
Maximum Registration Capacity	m ³		9999 / 99999 / 99999,99 / 99999,999
Mounting on the network	-		All Positions
Initial Flow	Qi	l/h	1
Maximum Working Pressure	bar		16
Maximum Working Temperature	°C		50
Pressure Loss	bar		0,63
Smallest Reading Resolution	m ³		0,00005
Class	-		Class 1 / Class 2

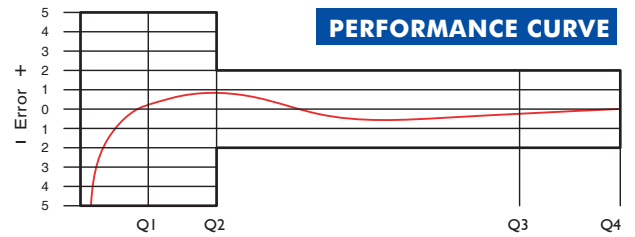

DIMENSIONS

Nominal diameter	DN	15	15	20	20	mm
Connecting diameter	D	G 3/4	G 3/4	G 1	G 1	B
Total overall meter height	H	120	120	118,9	118,9	mm
Axis height	h	25,3	25,3	25,3	25,3	mm
Width	B	95	95	95	95	mm
Length	L	110 115	165 170 190	110 115	165 190	mm
Length with connections	LB	190 195	245 250 270	190 195	245 270	mm
Unit weight		0,58	0,65	0,65	0,71	kg
Package Weight (without connect.)		6,90	7,50	7,50	8,10	kg
Package Weight (with connect.)		8,50	9,10	9,40	10,0	kg
Quantity per package		10	10	10	10	pcs.
Package dimensions		27x49x16	27x48x20	27x49x16	27x48x20	cm

